


UT-800F Series of Protection Relays

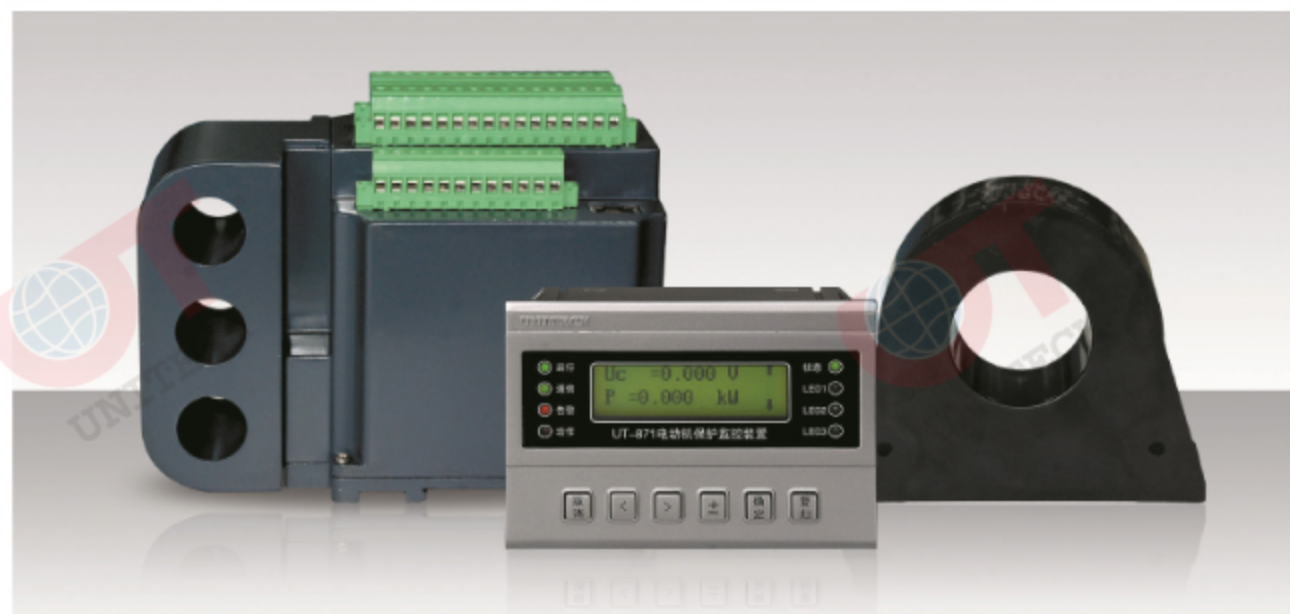

SUMMARY

This product integrates protection, monitoring, control, communication, event recording, fault recording and other functions. It is suitable for feeders and motors up to 660V.

ADVANTAGE



Independent current transformer

Configure a separate transformer that connects to the protection host via weak current signals, suitable for scenarios where there is no mutual inductor in the field. Current transformers can be configured as integrated or separate according to field requirements.



Temperature measurement and monitoring

Real-time measurement and monitoring of the ambient temperature inside the switchboard and the operating temperature of the motor, driving the alarm when there are abnormalities.



Accurate judgment

Without taking external measures, the device switching on (telesignalization) can eliminate the influence of the distribution parameters of shielded and unshielded cables under 1000m, and can be switched on without misjudgment.



Easy to install

Separate installation of LCD panel from protective host can meet the changing and complex scene in the field, especially when panel space is compact.